


1U 2x24 HD MUSA

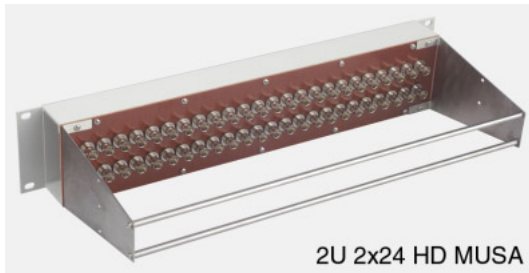

2U 2x24 HD MUSA

CANFORD AES AUDIO JACKFIELDS - 75 ohm, MUSA

Two, three and four-row MUSA panels, offering a 75ohm coaxial patching solution for unbalanced AES audio. Available with 20, 24 or 26 connectors per row in 1U panels and 20 or 24 connectors per row in 2U and 3U panels. Rear connection is via 75ohm BNC sockets.

Note that the connectors are straight-through, non-normalled, and require U-links or patchcords.

The panels are identical to the Canford MUSA HD 3Gb/s 1080p Video Patch Panel series which meet the requirements of SMPTE424M so transmission and return loss performance far exceeds that required for AES audio format signals. The simplicity of the one-piece contacts in both panel connectors and U-links, and the non-normalled, U-link concept, means there are no complex moving parts, or switch contacts, offering excellent reliability even when subjected to vibration in use or in transit. The body parts are nickel-plated and centre contacts are gold plated giving a smooth mating action and overcoming the 'sticktion' and tarnishing of the now obsolete silver MUSA. Solid interface insulators prevent dust ingress meaning dust caps on unmated ports are unnecessary.

Panels are manufactured from a rigid aluminium extrusion and are fitted with two lacing-bars and two 5mm (1U panels) or 7.5mm (2U and 3U panels) snap-on designation strips for which AutoCAD templates are available from the Tech Zone at www.canford.co.uk or from Technical Support. Depth behind panel, including lacing-bar, 180mm.

Finished in Dawn Grey (BS4800-10A03) or Black as standard, other colours and connector layouts are available to special order but may be subject to an MOQ.

Optional accessories: 1U 2-row and 2U 3-row panels require Canford 4401 1U size U-links; 2U 2-row and 3U 4-row panels require Canford 4402 2U size U-links, see 'Canford MUSA HD 3Gb/s 1080p U-Links'. Flexible patch cords see 'Canford MUSA HD 3Gb/s 1080p Patchcords'. Spare 432mm designation-strip paper (not suitable for printers) and covers, see 'Designation strips - snap on'.

Recess rack-mounting brackets and tamper-proof cover-plate, see 'Recess rack-mounting brackets and anti-tamper covers'.

Application note:

Where a cover-plate is used with U-links, 50mm recess brackets are required, 100mm min type is required for patchcords.

Manufactured by Canford.

48-4315	MUSA HD PATCH PANEL 1U 2x20 MUSA HD, black
48-4319	MUSA HD PATCH PANEL 1U 2x24 MUSA HD, black
48-4321	MUSA HD PATCH PANEL 1U 2x26 MUSA HD, black
48-4345	MUSA HD PATCH PANEL 2U 2x20 MUSA HD, black
48-4349	MUSA HD PATCH PANEL 2U 2x24 MUSA HD, black
48-4351	MUSA HD PATCH PANEL 3U 4x20 MUSA HD, black
48-4353	MUSA HD PATCH PANEL 3U 4x24 MUSA HD, black
48-4375	MUSA HD PATCH PANEL 2U 3x20 MUSA HD, black
48-4379	MUSA HD PATCH PANEL 2U 3x24 MUSA HD, black
48-4314	MUSA HD PATCH PANEL 1U 2x20 MUSA HD, grey
48-4318	MUSA HD PATCH PANEL 1U 2x24 MUSA HD, grey
48-4320	MUSA HD PATCH PANEL 1U 2x26 MUSA HD, grey
48-4344	MUSA HD PATCH PANEL 2U 2x20 MUSA HD, grey
48-4348	MUSA HD PATCH PANEL 2U 2x24 MUSA HD, grey
48-4350	MUSA HD PATCH PANEL 3U 4x20 MUSA HD, grey
48-4352	MUSA HD PATCH PANEL 3U 4x24 MUSA HD, grey
48-4374	MUSA HD PATCH PANEL 2U 3x20 MUSA HD, grey
48-4378	MUSA HD PATCH PANEL 2U 3x24 MUSA HD, grey

UK Sales - tel 0191 418 1122
 fax 0191 418 1123
sales@canford.co.uk

International Sales - tel +44 191 418 1133
 fax +44 191 418 1134
international@canford.co.uk

Tech Support - tel 0191 418 1144
 fax 0191 418 1145
techsupport@canford.co.uk