



Lights



Camera




Action

PRELIMINARY

CINEO

L I G H T I N G™

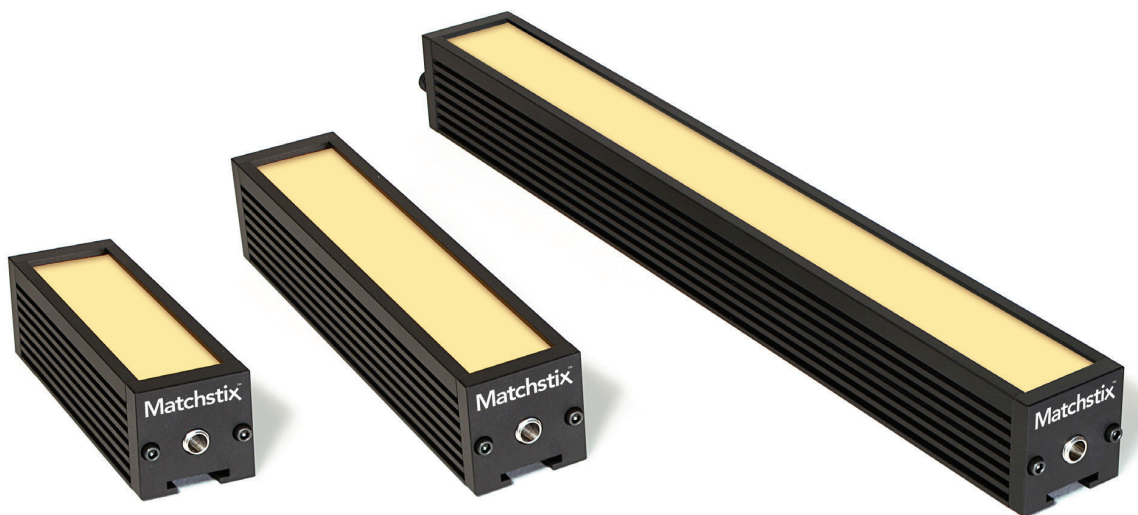

Matchstix™

Imagine a small, simple, color-accurate light source designed for image capture with the versatility of power and mounting options to go anywhere you need it.

Cineo Lighting and Litegear™ have teamed up to develop the Matchstix series of small, versatile Remote Phosphor light sources. Matchstix operate from any DC power source from 11.5 to 16 VDC, including many battery options. Connection uses standard co-ax DC power connectors. Matchstix are optimized for flawless, flicker-free control with Litegear Litedimmers. Only 35mm wide, Matchstix are available in 3", 6" and 12" lengths and are surprisingly bright for their size. Available in all Cineo color temperatures, their color quality perfectly matches all other Cineo softlights. The back side of all Matchstix includes a standard cold-shoe slot for limitless mounting options virtually anywhere.

A few examples where Matchstix are the ideal small lighting source:

- On-camera for a soft keylight
- Inconspicuous uplighting for TV newsdesks
- Perfect for teleprompters and steadycam use
- Lighting for shooting automobile interiors
- Perfect for tabletop photography

Ruggedly built from anodized aluminum and color-coded for easy identification of CCT, these small sources can easily withstand the most demanding applications. It's what you expect from Cineo.

Features

- Utilizes Remote Phosphor Technology (RPT) for accurate, consistent output
- Optimized output for film, video and still photography
- Available with 2700K, 3200K, 4300K and 5600K CCT
- Output: 12" - 20 fc @ 3' (215 lx @ 1m)
- 6" - 9.2 fc @ 3' (100 lx @ 1m)
- 3" - 4.5 fc @ 3' (49 lx @ 1m)
- 160° light spread
- Small and lightweight
- Flicker-free
- Completely silent operation
- Local and DMX dimming options with no color-shift: 0-100%

Specifications

- Input voltage: 11.5 - 16 VDC
- Power consumption: 12" - 17 watts, 6" - 8 watts, 3" - 4 watts
- Lamp head dimensions: 1.3"W x 1.3"D x 12", 6" or 3"L (35mm x 35mm x 305mm, 152mm or 76mm)
- Lamp head weight: 12" - 16 oz (454g), 6" - 8 oz (227g), 3" - 4 oz (114g)
- 35,000 hr. L70 rated
- Environmental temperature range: -20° - +50° C
- Max. temperature rise: +30° C
- 2-year parts and labor warranty
- ETL and cETL pending, CE Compliant
- Zero UV light emitted
- Made in USA





Lights



Camera









Action

Matchstix™

CRI Measurement	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	CRI	CRI Extended	TLCI Results	
Matchstix @ 2700K	97	99	96	96	98	98	99	98	97	100	94	92	97	96	98	97	2700K	99
Matchstix @ 3200K	98	99	94	97	100	97	98	97	95	96	96	84	99	96	98	96	3200K	99
Matchstix @ 4300K	98	99	97	97	97	95	98	97	93	98	97	77	98	98	97	96	4300K	98
Matchstix @ 5600K	94	95	93	93	93	90	98	95	85	86	92	68	95	96	94	91	5600K	97
Matchstix @ 6500K	95	98	97	93	93	94	97	95	90	93	93	72	96	99	95	93	6500K	97

CRI is R1-R8, Extended is R1-R14

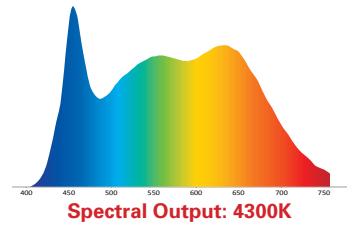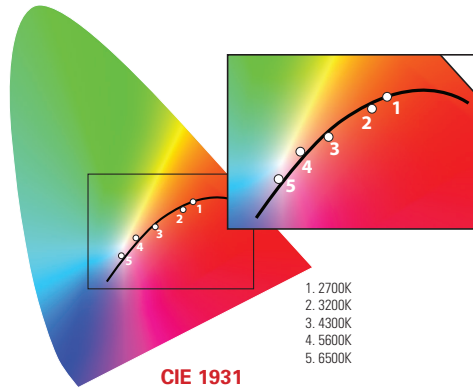

Specifications are subject to change without notice. Cineo Lighting and Matchstix are registered trademarks of Cineo Lighting, Inc.
©2014 Cineo Lighting, Inc. v06.01.14

CINEO
LIGHTING™



Unit 14, Fairway Drive, Greenford, Middlesex UB6 8PW United Kingdom
tel: +44 (0)20 8833 7600 fax: +44 (0)20 8575 8219 email: sales@lcauk.com web: www.lcauk.com

