

# 1037 compass 23

The new affordable 100mm professional fluid head

**NEW**



The new Miller Compass 23 fluid head is built by experienced craftsmen for professionals who want to stay ahead of the game without breaking the bank.

It is designed for users of medium size, large sensor cameras who require a light weight, compact 100mm fluid head with the ability to handle a wide range of payloads from 4kg to 14kg, with 4 positions of counterbalance and 3 levels of pan and tilt drag, plus zero resistance.

Compass 23 is ideal for shoots requiring multiple re-rigging where payloads are constantly changing and fast re-balancing and quick set ups are crucial. The Compass 23 quick and easy to use repeatable drag and counterbalance controls reduce production costs and save time.

The Compass 23 meets the demands of professional storytellers and comes with reliability and “THE RIGHT FEEL” that are the hallmark of every Miller product.

- Professional built-in quality at an affordable price.
- Lightweight, compact and robust alloy construction.
- Precision movement in three levels of flawless pan and tilt drag.
- Smooth start and soft stop pans and tilts.
- Easily accessible repeatable and reliable controls.
- Proudly designed and manufactured in Australia by Miller, the inventors and creators of the first patented fluid head.

Visit [www.millertipods.com](http://www.millertipods.com) for details of your nearest dealer

**MILLER** 

THE RIGHT FEEL

### 1037 COMPASS 23 FLUID HEAD

- Payload range: 4.0 - 14.0 kg (8.8 - 30.8 lbs)
- Payload capacity: 20.0 kg (44.0 lbs)
- Weight: 2.4 kg (5.3 lbs)
- Height above bowl: 153 mm (6.0")
- Ball level: Ø100 mm (3.9")
- Illumination: Bubble level
- Camera plate: Quick release sliding camera plate with 60 mm travel and 1/4", 3/8" and 1/4" screw & pin carriage
- Pan/tilt drag: 3 selectable fluid drag positions + 0
- Counterbalance: 4 selectable positions
- Pan/tilt lock: Positive lock caliper brake system
- Pan range: 360°
- Tilt range: + 90° / -75°
- Handle: Standard black anodised pan handle with adjustable angle
- Temperature range: -40° to +65° C (-40° to +149° F)
- Construction: Lightweight diecast aluminium alloy, moulded reinforced plastics
- Sealing: Water and dust resistant
- Finish: Matt black (low sheen) durable powder coated with anti-corrosive pre treatment
- Warranty: 3 Years


### OPTIONAL ACCESSORIES

- 493 1/4" screw & pin carriage
- 679 Pan handle - fixed with clamp
- 870 Softcase 1-stage
- 876 Softcase 2-stage
- 1204 Camera plate (including 1/4" & 3/8" screws + 1/4" screw & pin carriage)
- 1216 Accessory mounting bracket
- 1217 Accessory mounting adaptor

### SPARES

- P7715 Battery
- P0036 1/4" camera screw
- P0037 3/8" camera screw
- P3836 Clamp nut

### Counterbalance - four selectable positions

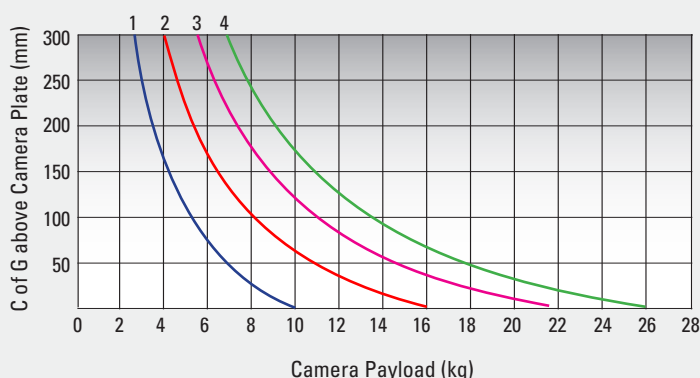

NOTE: This is a preliminary product flyer and specifications are subject to change without notice.

**1861 System Compass 23 Sprinter II**  
1-stage (Alloy) with mid-level spreader

- 14.0 kg  
30.8 lbs
- \*7.0 kg  
15.4 lbs
- 818-1568 mm  
32.2-62.5"
- 983 mm  
38"

**Components:**

- 1037 Compass 23 fluid head
- 1589 Sprinter II 1-stage tripod (alloy)
- 993 Mid level spreader
- 679 Pan handle - fixed with clamp
- 475 Rubber feet (set of 3)
- 870 Softcase 1-stage

**1862 System Compass 23 Toggle**  
2-stage (Alloy) with ground spreader

- 14.0 kg  
30.9 lbs
- \*6.7 kg  
14.7 lbs
- 543-1713 mm  
21.4-67.4"
- 843 mm  
33.2"

**Components:**

- 1037 Compass 23 fluid head
- 402G Toggle 2-stage tripod (alloy)
- 411 On ground spreader
- 679 Pan handle - fixed with clamp
- 554 Shoulder strap (padded)
- 876 Softcase 2-stage

**1863 System Compass 23 Toggle**  
2-stage (Alloy) with mid-level spreader

- 14.0 kg  
30.8 lbs
- \*6.7 kg  
14.7 lbs
- 543-1713 mm  
21.4-67.4"
- 843 mm  
33.2"

**Components:**

- 1037 Compass 23 fluid head
- 402 Toggle 2-stage tripod (alloy)
- 508 Above ground spreader
- 679 Pan Handle - fixed with clamp
- 554 Shoulder strap (padded)
- 550 Rubber feet (set of 3)
- 876 Softcase 2-stage

**1866 System Compass 23 Solo 100**  
3-stage (CF)

- 14.0 kg  
30.9 lbs
- \*6.0 kg  
13.2 lbs
- 373-2023 mm  
14.7-79.6"
- 861 mm  
31.9"

**Components:**

- 1037 Compass 23 fluid head
- 1505 Solo 100 3-stage tripod (carbon fibre)
- 679 Pan Handle - fixed with clamp
- 1520 Solo shoulder strap (aircell)
- 876 Softcase 2-stage

\* Weight does not include case.



#### AUSTRALIA

Miller Camera Support Equipment  
30 Hotham Parade, Artarmon,  
Sydney, NSW 2064  
Australia  
Tel: +61 2 9439 6377  
Fax: +61 2 9438 2819  
Email: sales@miller.com.au

#### USA

Miller Camera Support LLC  
216 Little Falls Road (unit 15 & 16),  
Cedar Grove,  
New Jersey 07009 USA  
Tel: +1 (973) 857 8300  
Fax: +1 (973) 857 8188  
Email: sales@millertripods.us

#### EUROPE

Miller Fluid Heads (Europe) Ltd.  
Unit 12A, Shepperton Business Park, Govett  
Avenue, Shepperton, Middlesex, TW17 8BA,  
United Kingdom  
Tel: +44 (0) 1932 222 888  
Fax: +44 (0) 1932 222 211  
Email: sales@millertripods-europe.com

THE RIGHT FEEL